

T58C

Compact, Series 3
55 ps



Packed with features to help accomplish your goals

Take on tough jobs in tight spaces with the T58C. This tractor brings you the best features from our compact and utility ranges, balancing high power output with maximized maneuverability.



1. PTO mode switch
(OFF, MANUAL,
AUTO)



2. Throttle lever



3. Rear external
hydraulic valve



4. Cabin



5. PTO ON/OFF
switch



6. Loader joystick
lever




Telescopic linkages and stabilizers

Telescopic linkages allow implements to be easily connection and swapped out, without needing input from the operator cabin. Stabilizers make it possible for the tractor to adapt to implements of varying loads, without putting too much pressure on the engine productivity.



Durable power steering and axle configuration

The heavy duty 4WD front axle allows the tractor to lift heavy loads and tow large implements. Powerful hydraulics support the power steering system, which benefits from a dual action mechanism using a hydraulic cylinder and tandem type hydraulic pump.

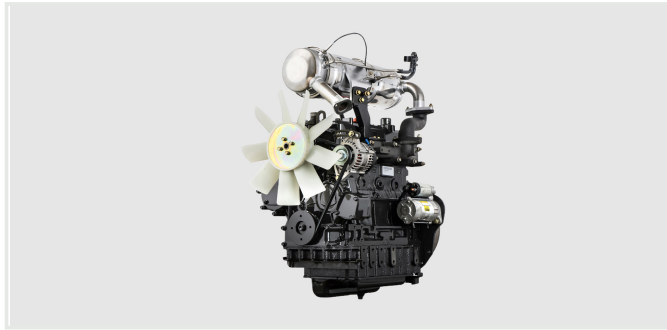

4-cylinder TYM diesel engine with high output

Equipped with a powerful, Tier-4 certified 4-cylinder engine, this tractor has an output comparable to utility tractors while maintaining the dimensions of a sub-compact tractor. The durable body and efficient engine come together to perform medium duty applications efficiently and productively.




Deluxe cabin with climate control

Heating and A/C enable operators to facilitate task completion, safely and productively in warmer or colder weather.



Superior operator amenities for greater productivity

Fully equipped with modern amenities to maximize operator comfort, this tractor is complete with a large cup holder, wireless smartphone charging dock, multiple USB ports to charge personal devices and a bluetooth speaker. These features are designed to promote productivity, keeping drivers hydrated, connected and alert during every job.

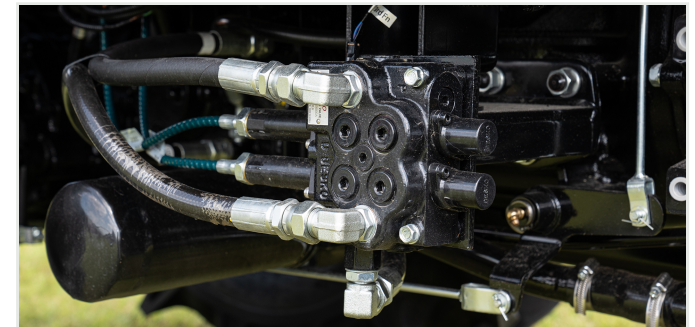

3rd function hydraulic valve to enhance implement capabilities

Allowing for versatile implement handling, this tractor comes with ready with a 3rd function installation kit. It can maximize the use of a bucket implement with 4-in-1 functionality, including lifting, tilting, dumping and grappling.

Technical specifications

ENGINE	
Engine manufacturer	TYM A2300T
Type	Turbo Charger
Gross engine power	55 ps
PTO power	44.9 ps 33.0 kW
Rated engine speed	2600 rpm
No. of cylinders	4
Displacement	139.56 cu. in. 2287 cc
Air cleaner	Dual Dry
Alternator	12V, 70A
Fuel system	IDI
POWERTRAIN	
Transmission type	Sync/Shuttle
No. of speeds	F8 x R8
Max. traveling speed	18.45 mph 29.7 km/h
Brakes	Wet Disc
Steering	Hydrostatic
Clutch	Dry Disc
CAPACITIES	
Fuel tank	17.0 gal 60 L
Coolant	6.9 qt 6.5 L
Crankcase	6.8 qt 6.4 L
Transmission/Hydraulics system	9.2 gal 35 L
Front axle	10.5 qt 9.9 L

PTO	
PTO type	Independent
PTO control	Electric/Hydro
PTO rear	540/750/1000
HYDRAULIC SYSTEM	
Pump type	Dual Gear Pump
Implement flow	7.66 gpm 29 lpm
Steering flow	4.25 gpm 16.08 lpm
Total flow	11.91 gpm 45.08 lpm
Category, 3-point hitch	Cat1
Hitch lift capacity	3822 lb 1733 kg
Hitch lift capacity at 24 inches behind link ends	3057 lb 1386 kg
Lift control type	Position/Draft/Elec
No. of standard remote valves	6
DIMENSIONS & WEIGHTS	
Overall length with 3-point hitch	133.9 in. 3400 mm
Overall width	63.4 in. 1610 mm
Wheelbase	76.2 in. 1935 mm
Height to top of ROPS	98 in. 2490 mm
Min. ground clearance	13.4 in. 340 mm
Min. turn radius with brakes	121.2 in. 3080 mm
Min. turn radius without brakes	131.5 in. 3340 mm
Weight with ROPS	- -
Weight with cab	4365 lb 1980 kg
Track width	F: 1290 mm / R: 1215 mm
STANDARD TIRES	
Agricultural - Front	9.5 - 16
Agricultural - Rear	13.6 - 26

LX554CE Front-End Loader

Attachments

The LX554CE front-end loader raises the bar in material handling and productivity. Providing an impressive lift height and capacity, the LX554CE complements the power and performance of its compatible TYM T58 and T58C compact tractors.

Lift height	111.6 in. / 2834 mm
Lift capacity	2646 lb / 1200 kgf
Self leveling	Available

CAPACITIES & REACH	
Lift height	111.6 in. 2834 mm
Max. lift height under level bucket	103.1 in. 2618 mm
Clearance with bucket dumped	82.2 in. 2089 mm
Reach at maximum lift height	4.5 in. 115 mm
Max. dump angle	76°
Reach with bucket on ground	69.4 in. 1763 mm
Max. rollback angle	46°
Digging depth	6.0 in. 153 mm
Lift capacity	2646 lb 1200 kgf
Breakout force at ground level, pivot points	5031 lb 2282 kgf
Bucket rollback force at ground line	4517 lb 2049 kgf
Self leveling	Available
Relief valve setting (Loader control valve)	2489 psi 175 kg/sq. cm



DIMENSIONS & WEIGHTS	
Overall height in carry position	59.3 in. 1507 mm
Depth of Attachment (to the back of the inner shell)	21.6 in. 549 mm
Height of Attachment	20.1 in. 510 mm
Length of Attachment (to pivot point)	26.2 in. 665 mm
Weight of boom & quick attach mechanism (1)	525 lb 238 kg
Weight of mounting frame (2)	209 lb 95 kg
Weight of bucket (3)	251 lb 114 kg
Loader total weight (1+2+3)	985 lb 447 kg
Lift cylinder	2.8x1.6 in. 60x35 m
Bucket cylinder	2.8x1.6 in. 60x35 m
Attachment used for specification	61.8 in. 1570 mm

CYCLE TIMES	
Boom raising time	6.4 sec
Boom lowering time	3.6 sec
Bucket rollback time	3.2 sec
Bucket dumping time	4.8 sec

COMPATIBLE BUCKET SIZES

TYM's multi-purpose buckets are capable of bulldozing, scraping, loading, metering, moving, and clamping material.

66" Front-End Loader bucket

Upgrades for the Series 3, T58C

Complement the capabilities of your TYM tractor with compatible accessories and options.

Accessories

Front counterweights



Options



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world