

2022 Catalog



Series 6

Utility Tractors

129 ps

For distribution and sales in the South Korean market only

The Series 6 tractors combine robust interiors and exteriors, equipping them for heavy duty and time-intensive applications. Whether you are looking to traverse hard or soft terrain, power large implements or attachments and

maximize productivity of the engine or operator, the Series 6 tractors cover it all.



T130

Engine power Lift capacity
129 ps **3742 kg**

Taking utility to the next level, by design

In addition to impressive lift capabilities, greater transmission controls and power output, the Series 6 tractors are equipped with deluxe operator amenities. With cabins that provide lasting comfort, these tractors also promote operator productivity and accelerate project completion.

Featuring models capable of reaching speeds as low 0.1 mph (0.2 kmph), this series demonstrates effectiveness in applications where high-impact results need to be made in fewer passes, such as trenching. The high-efficiency, liquid cooled engine allows for less than 10% drop off from the front to the back of the tractor. Combined with a large volume fuel tank, this tractor is ready to take on any time-intensive, heavy-duty application, productively and cost-effectively.


Most popular applications



Material
Handling



Land Clearing
& Forestry




Construction



Arable
Farming



All the right features to get the job done

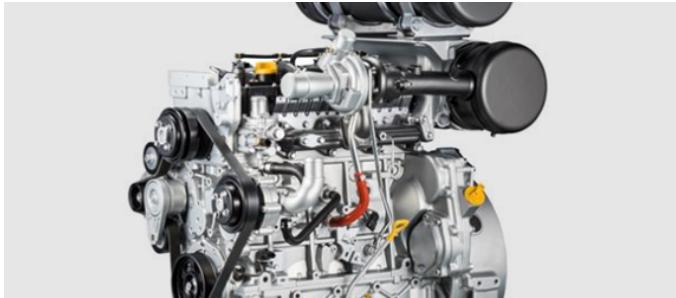

High power diesel engine

With the options like the 4-cylinder, Tier 4 Doosan turbo-charged engines, these tractors offer greater output at lower torque, delivering performance and efficiency across applications.



Interior detailing to promote operator comfort

Operators can easily activate core functions of the tractor from the main console, including the PTO on/off switch. Detailed digital alerts and indications give operators at-a-glance understanding of the tractor.



Deluxe cabin with climate control

These tractors offer entry and exit from either side and host all the modern amenities for operator comfort. With greater visibility, heating and A/C as standard, operators can be productive, safe and comfortable in all kinds of weather.



Durable, shock absorbing axle configuration

The 4WD front axle allows these tractors to lift heavy loads and tow large implements, absorbing shock and maintaining tractor stability. The hydraulic power steering is dual-action, with a hydraulic cylinder and tandem-type hydraulic pump.



3-point hitch with powerful lift capacity

The 3-point linkage on the rear has an impressive lift capacity that reaches the end ball joint. The rear PTO control can be used to adjust rpm based on the task, increasing it for more intensive applications like slashing and digging.



External lever to adjust rear implements

In addition to the in-cabin controls, this tractor has an external position lever near the 3-point hitch. This allows operators to adjust an implement position as soon as it is connected, without needing to go to the cabin. This enables quick and convenient switching between implements, enhancing tractor versatility.

T130

The next evolution



Key specifications:

Engine power
129 ps

Engine manufacturer
Deutz TCD3.6L4

Lift capacity
3742 kg

PTO power
120 ps



1. Backlit logo



2. Sideview mirrors
with LED



3. Push to start
button



4. Adjustable
suspension seat



5. Hydraulic
implement controls



6. Heated rear
window

Specification Guide

MODEL	T130
ENGINE	
Engine manufacturer	Deutz TCD3.6L4
Engine power	129 ps 95 kW
Type	Water-cooled, 4-cylinder diesel engine
PTO power	120 ps 88.2 kW
Rated engine speed	2200 rpm
No. of cylinders	4
Displacement	3621 cc 220.96 cu. in.
Air cleaner	Dual Dry
Alternator	12V, 120A
Fuel system	CRDI
HYDRAULIC SYSTEM	
Pump type	Dual gear pump
Implement flow	80.25 l/min 21.2 gpm
Steering flow	36.34 l/min 9.6 gpm
Total flow	116.59 l/min 30.8 gpm
Category, 3-point hitch	II
Hitch lift capacity	3742 kg
Hitch lift capacity at 24 inches behind link ends	3630 kg 8003 lb
Lift control type	Position/Draft
No. of standard remote valves	6 port
CAPACITIES	
Fuel tank	190 L 50.19 U.S. gal.
Coolant	18.1 L 19.1 qt
Crankcase	8 L 8.5 qt
Transmission/Hydraulics system	100 L 26.4 U.S. gal
Front axle	18.1 L 4.8 U.S. gal
POWERTRAIN	
Transmission type	Power Shuttle / 6-Speed Shift
No. of speeds	F36 x R36
Max. traveling speed	37.4 km/h 23.05 m/h
Brakes	Wet Disc
Steering	Hydrostatic
Clutch	Wet Multi Type

Specification Guide

MODEL

T130

DIMENSIONS & WEIGHTS

Overall length with 3-point hitch	4490 mm 176.77 in.
Overall width	2360 mm 92.91 in.
Wheelbase	2590 mm 101.96 in.
Height to top of ROPS	2940 mm 115.74 in.
Min. ground clearance	410 mm 16.14 in.
Min. turn radius with brakes	4210 mm 165.7 in.
Min. turn radius without brakes	4740 mm 186.6 in.
Weight with cab	4470 kg 9855 lb

PTO

PTO type	Independent
PTO control	Electro-hydraulic
PTO rear	540/750/1000 rpm

STANDARD TIRES

Agricultural - Front	380/85 R 24
Agricultural - Rear	460/85 R 38



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

www.tym.world

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.