

# T130

Utility, Series 6  
129 ps



# Packed with features to help accomplish your goals

TYM's flagship tractor combines sophisticated design, powerful performance, and premium features for operator convenience.




1. Backlit logo



2. Sideview mirrors with LED



3. Push to start button




4. Adjustable suspension seat



5. Rear external hydraulic port (hydraulic top link)



6. Heated rear window

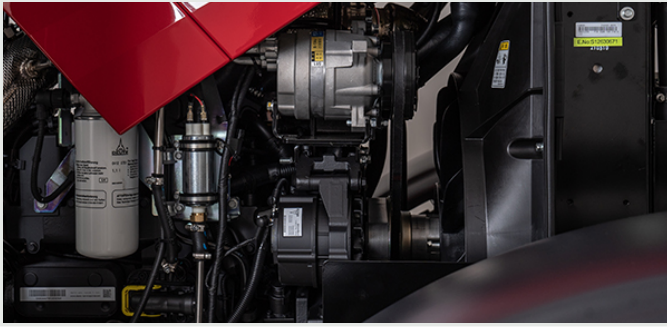

### Powerful, productive Deutz engine

Boasting precise German engineering, this engine offers high power and torque even at lower RPMs. Optimized to work with minimal breakdown, this engine offers productive work over a longer lifecycle.



### Smart charger and insulated cup holder

The T130 has the most premium features for operator convenience, including a wireless smartphone charger and a keep hot or cold cupholder, within easy reach from the operator seat.



### LED worklights for better visibility

Work safely in low-light conditions, with brighter lights and a wider field of illumination.



### 10.1 inch touchscreen monitor

Use the easy-to-read 10.1-inch touch screen monitor to view vital information such as the vehicle status.



### Side / rear work lights

Work lights are located on the sides and rear of the tractor to allow the operator to safely enter and exit.



### Electronic organ-type pedal

The organ-style pedal, eases strain on the ankles so that the pedal can be pushed with less effort and give more accurate control to the operator.



# Technical specifications

ENGINE	
Engine manufacturer	Deutz TCD3.6L4
Gross engine power	129 ps
Type	Water-cooled, 4-cylinder diesel engine
PTO power	119 ps   87 kW
Rated engine speed	2200 rpm
No. of cylinders	4
Displacement	220.96 cu. in.   3621 cc
Air cleaner	Dual Dry
Alternator	12V, 120A
Fuel system	CRDI
POWERTRAIN	
Transmission type	Power Shuttle / 6-Speed Shift
No. of speeds	F36 x R36
Max. traveling speed	23.05 mph   37.4 km/h
Brakes	Wet Disc
Steering	Hydrostatic
Clutch	Wet Multi Type
CAPACITIES	
Fuel tank	50.19 U.S. gal.   190 L
Coolant	19.1 qt   18.1 L
Crankcase	8.5 qt   8 L
Transmission/Hydraulics system	26.4 U.S. gal   100 L
Front axle	4.8 U.S. gal   18.1 L

PTO	
PTO type	Independent
PTO control	Electro-hydraulic
PTO rear	540/750/1000 rpm
HYDRAULIC SYSTEM	
Pump type	Dual gear pump
Implement flow	21.2 gpm   80.25 l/min
Steering flow	9.6 gpm   36.34 l/min
Total flow	30.8 gpm   116.59 l/min
Category, 3-point hitch	II
Hitch lift capacity	8260.7 lb   3747 kg
Hitch lift capacity at 24 inches behind link ends	8003 lb   3630 kg
Lift control type	Position/Draft
No. of standard remote valves	6 port
DIMENSIONS & WEIGHTS	
Overall length with 3-point hitch	176.77 in.   4490 mm
Overall width	92.91 in.   2360 mm
Wheelbase	101.96 in.   2590 mm
Height to top of ROPS	115.74 in.   2940 mm
Min. ground clearance	16.14 in.   410 mm
Min. turn radius with brakes	165.7 in.   4210 mm
Min. turn radius without brakes	186.6 in.   4740 mm
Weight with cab	10020 lb   4545 kg
Track width	F: 1880 mm / R: 1815 mm
STANDARD TIRES	
Agricultural - Front	380/85 R 24
Agricultural - Rear	460/85 R 38

# LX125P Front-End Loader

## Attachments

Engineered to lift higher and lift heavier materials, the TYM LX125P is optimized for superior material handling. Taking advantage of the power and performance of the TYM utility tractors, the LX125P is compatible with the T130.

Lift height	162 in. / 4114 mm
Lift capacity	5415 lb / 2456 kgf
Self leveling	Available

CAPACITIES & REACH	
Lift height	162 in.   4114 mm
Max. lift height under level bucket	152.5 in.   3873 mm
Clearance with bucket dumped	127 in.   3227 mm
Reach at maximum lift height	14.9 in.   379 mm
Max. dump angle	60°
Reach with bucket on ground	98.9 in.   2513 mm
Max. rollback angle	52°
Digging depth	6.1 in.   155 mm
Lift capacity	5415 lb   2456 kgf
Breakout force at ground level, pivot points	6618 lb   3002 kgf
Bucket rollback force at ground line	6874 lb   3118 kgf
Self leveling	Available
Relief valve setting (Loader control valve)	2987 psi   210 kg/sq. cm



DIMENSIONS & WEIGHTS	
Overall height in carry position	86.4 in.   2194 mm
Depth of Attachment (to the back of the inner shell)	22.8 in.   579 mm
Height of Attachment	22.2 in.   563 mm
Length of Attachment (to pivot point)	34.9 in.   886 mm
Weight of boom & quick attach mechanism (1)	1210 lb   549 kg
Weight of mounting frame (2)	591 lb   268 kg
Weight of bucket (3)	448 lb   203 kg
Loader total weight (1+2+3)	2249 lb   1020 kg
Lift cylinder	3.1x1.8 in.   80x45 m
Bucket cylinder	3.0x1.6 in.   75x40 m
Attachment used for specification	92 in.   2330 mm
CYCLE TIMES	
Boom raising time	4.4 sec
Boom lowering time	2.8 sec
Bucket rollback time	2.6 sec
Bucket dumping time	3.6 sec

# Upgrades for the Series 6, T130

Complement the capabilities of your TYM tractor with compatible accessories and options.

## Accessories

Front counterweights



## Options



# Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

[www.tym.world](http://www.tym.world)